



Since 1986

Fall, 2023
Vol. 27, No. 3

Published by: *Schroeder Log Home Supply, Inc.*
Art Director: *Doug Todd*
1101 SE 7th Ave.
Grand Rapids, MN 55744



1-800-359-6614
(218) 326-4434

FAX

1-800-755-3249
(218) 326-2529



WEBSITE
www.loghelp.com

In This Edition:

Sansin Firestop99
Lanz Logscraper
Fisher Super Giant Pens
Anvil "Z" Log Scraper
Stir Whip Mixing Wand
Timber Tools Drill Guide
Conceal 10.5 oz.
Manus Bond Sale
Interior Wood Finishes
Tread Spread
LifeTime Sale
OMG Sale
Restoration Special

SCHROEDER
LOG HOME SUPPLY, INC.
Grand Rapids, MN

LOG CORE

Inside Log Help For Those Into Log Buildings

SANSIN FIRESTOP99

Sansin FireStop99

delivers the ultimate flame spread protection in a beautiful interior wood finish. In the presence of heat or flame, Firestop99 will intumesce (expand its film thickness) creating a thick charred heat-insulating foam layer. This action prevents oxygen from reaching the combustible coated materials (the "fuel") and diluting combustible gases if released by the fuel.

FireStop99 provides "Class A" flame spread protection that conforms to ASTM E84 and Canadian Standard CAN/ULC S-102-10.

FireStop99 has excellent adhesion and is low-VOC, with two-coat application and simple



FIRESTOP 99



UNTREATED 5 MINUTE BURN TEST



FIRESTOP 99 5 MINUTE BURN TEST



soap and water clean-up. Available in clear or custom tinted tones. Sansin FireStop99 is designed to be applied over well dried combustible surfaces in premises where water condensation caused by high humidity is not expected. FireStop99 is a functional coating and must not be topcoated unless the topcoat has been independently tested to pass functional

expectations. FireStop99 coated surfaces must be protected from wetting. [Made in Canada](#). P200-4805-FS99-05 **Clear 5-gal \$571.99**

Application Temp: 68-77°F.

Coats: 2 Coats.

Coverage: 90-100 sq. ft. per gal.

Method: Brushing, Roll, or Spray.

Surface Prep: Surface must be clean, free from dust, grease, and oils. Sand the surface: See Technical Data for details.

Drying Time: At 70°F & 50% RH: To Touch: 30 minutes to 1 hour.

Storage/Shelf Life: 6 months when stored between 33-86°F - Do Not Freeze.

Cleanup: Soap and Water.

Sheen: Translucent Low Luster.

Order Online

FireStop99 is Special Order - Nonreturnable
Ask Us About Custom Tinted Tones!



TOOL TALK

LANZ LOGSCRIBER



Once set, the log contours can be copied 100% reliably and exactly horizontally and vertically. The Logscraper is made of black anodized aluminum. Uses Fisher Super Giant pens (not included). [Made in Germany](#). T223-SCRIBER-BLOCKBAU \$399.99

[Order Online](#)

FISHER SUPER GIANT PLOTTER PEN

Unlike ordinary ball pens, the cartridge is pressurized at nearly 50 lbs. per sq. inch. The ink is continuously fed to the tungsten carbide ball, allowing writing at any angle, even upside down.

The ink is also reported to write well on wet wood, sap, and over chainsaw bar oil. Medium point with metal locator ring. 2" long and .452" dia. [Made in the USA](#). \$12.99 each



Black Ink T064-PSGM20BK
Blue Ink T064-PSGM20BU
Red Ink T064-PSGM20RD

[Order Online](#)

NEW STIR WHIP MIXING WAND

The most versatile mixer on the market, with a unique design that's effective for mixing materials of any viscosity. Designed with a 3/8" steel hex shank and a nylon mixing head, the Stir Whip™ features flexible "fingers" that reach into the corners of containers for more complete mixing. This unique mixing head offers any number of benefits:

- **Maximum lift from the bottom of containers**
- **Low drag for mixing thick materials with less power so it won't kill your battery**
- **Effective use with most viscous fluids**
- **Flexes to fit through 5-gal pour spout for use without opening the bucket**
- **Cleans up in seconds**

[Made in China](#).

H164-HD43440 \$12.99



[Order Online](#)



TIMBER TOOLS DRILL GUIDE

A precision tool designed to bore perpendicular holes. Accurate drilling is achieved with the auger tip pulling the base flat against the level timber surface. Depth and upper limit stops, retraction springs, and centering template ring for ten auger bit sizes from 3/8" to 1". The maximum drill depth is 19" for the 24" Drill Guide. Drill clamp diameter is 43 mm (Euronorm) or 1.69". The portability of these drill guides ensures that you can drill accurately where-ever you might find yourself. **Caution:** Always use drill motor with built-in safety clutch. [Made in Canada](#).

T217-DRILLGUIDE24 **Drill Guide For 24" Auger Bit** \$629.99

[Order Online](#)




ANVIL "Z" LOG SCRAPER

For removing cambium and bark from those hard to reach areas such as knots. The Anvil "Z" is 17" long with a 5" long

wooden handle for a two-handed grip. The teardrop shaped blade is 4½" long from point to heel and 2½" at the widest point. Curved on the left side with a ¾" long straight edge on the other. Hand forged from high carbon steel and heat treated to retain a sharp edge. [Made in the USA](#).

T271-KCI5258 \$68.99

[Order Online](#)

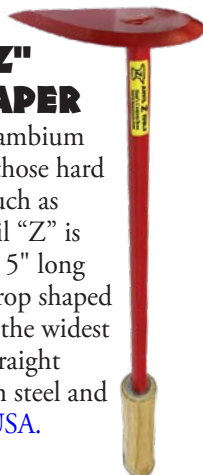

SOF SEAL PLUS PGASKET

NEW



- Water resistant • Mold resistant • Mildew resistant
- Non-gassing • Non-exuding • Easy to use
- Clean product • Inert • Recyclable
- Meets all requirements of the 1990 Clean Air Act

Form: Clean, Dry, Pre-formed, Air Leak Gasket.

Type: Engineered polymer foam gasket for use in construction.

Temperature Limits: -45°F to +160°F.

Storage: SOF Seal Plus should be stored in a well ventilated area and should not be kept in direct sunlight. It should be kept away from heat sources and open flames.

SOF Seal Plus is an economical 1 3/8" closed-cell polyethylene foam Pgasket used as a moisture and air infiltration barrier in the joints of log homes. It is extremely flexible and comprised of a convenient nail fin for easy installation. SOF Seal Plus has a reinforced opening in the middle of the profile and provides a low compression deflection to prevent bowing of the wooden frame. It is water resistant and easily fills various sizes and shapes of marriage joint openings. SOF Seal Plus has a low water vapor permeance and performs better than other materials if condensation is formed by moisture laden air leaking through wall cavities and joint openings. 775' per case. [Made in the USA.](#)

Property	Value	ASTM Test Method
Density lb/ft ³ (kg/m ³), avg.	1.8 - 2.5 (28-40)	D 1622
Permeability (perms)	< 65	E 96
Compression Recovery, %, min	> 96	D 5249
Compression Deflection psi (kPa)	1.6 (11.3)	D 5249
Tensile Strength psi (kPa)	26.4 (182)	D 3575
Water Absorption (g/cc)	< .03	C 1016 Procedure B

BR144-120-91-1500-5 **Sof Seal Plus 775' spool/case \$265.00**

[Order Online](#)

EYE ON CAULKING

Conceal
Easy to Use - Hard to See
Textured Caulk for Wood

Delivers performance that's hard to see. Conceal's colors blend in with the most popular stains used on log homes, and Conceal's light texture simulates the natural roughness of wood. The combination of color and texture makes it hard to see where the caulking ends and the logs begin. Although the caulking is hard to see, Conceal delivers performance. It has superior elongation, memory, and adhesion. Is resistant to rainfall in 1-4 hours and excellent for filling and concealing checks. Conceal has a limited lifetime warranty. **Application Temp:** 50-90° F. **Cleanup:** Soap & water. **Shelf Life:** 3 years. [Made in the USA.](#)



10.5 oz. Tubes (12 tubes per case)

Tube \$9.89 Case \$118.68

[Order Online](#)

MANUS-BOND 75-AM CAULKING



A polyurethane caulking that has excellent adhesion to wood, especially on wood treated with paraffinic oil stains such as ProLuxe/Sikkens. It is paintable, sandable, and cures fast, even in low temperatures. Extremely low odor. Excellent for using in tight, enclosed spaces and more pest resistant than latex caulks. If it rains shortly after application, it will not wash down the sides of your walls like acrylic based caulking. Instead, the rain will actually help it to set up. **Application Temp:** Surface must be above 40° F and frost free. **Note:** If applying after staining, remember to cover Manus-Bond with stain after caulking has cured; this will provide UV protection and extend its longevity. **Cleanup:** Mineral spirits. **Shelf Life:** 1 year. [Made in the USA.](#)



Cedar

10.3 oz. Tubes (12 tubes per case)

Tube \$6.45

Case \$77.40

10% Off Through October!

[Order Online](#)

[See More Caulking Online!](#)

INTERIOR WOOD FINISHES



Since 1986



An extremely effective, attractive, semi-transparent exterior stain that is followed by a weather-repellent topcoat, Cascade. Capture also works well by itself as a one coat interior stain or can be top-coated with Symphony as the topcoat (see next page). All three are products are freeze-thaw stable in their containers through at least 5 freeze-thaw cycles. Capture Log Stain's unique elastic formula allows it to move freely as your logs move, instead of cracking and peeling. **Application Temp:** 40-90° F. **Coverage:** 150-300 sq. ft. per gal., depending on surface roughness. **Cleanup:** Soap and water. **Made in the USA.**

1 gal. ~~\$90.99~~ \$81.89 5 gal. ~~\$410.99~~ \$369.89

[See More Online](#)

IWF SERIES INTERIOR WOOD FINISHES



Available in two deep-penetrating formulas: Polyurethane (IWF-P) & Alkyd (IWF-A) based resin wood finishes for those looking for the basic oiled look. **Application Temp:** 50-80° F. **Coverage:** Approx. 200-400 sq. ft. per gal. **Cleanup:** Mineral spirits. **Do Not Freeze. Made in the USA.**

⊘ Prohibited in: AZ (Maricopa County) CA, CT, DC, DE, IL, IN, MA, MD, ME, NJ, NH, NY, OH, PA, RI, VA, VT.

Color	1 gal.	5 gal.
Clear	\$67.99	\$299.99
Honey	\$68.99	\$304.99

[See More Online](#)



OUTLAST INSIDE SATIN

A premier interior treatment designed with log home wall and trim surfaces in mind. Available in clear, light, and medium, it is "tough as nails", but allows interior log moisture vapor to escape without clouding the finish. Outlast Inside Lo-Glos provides all the benefits of Outlast Inside Satin in a low gloss sheen.

Use over Inside Satin when a glossier look is desired. Excellent for kitchen cabinets, trim work, doors and more. **Not Suggested for Floors.** **Application Temp:** Above 40° F. **Coverage:** 400 sq. ft. per gal on smooth wood. **Cleanup:** Soap and water. **Do Not Freeze.**

Outlast Inside Satin and Inside Lo-Glos are "stand alone" products. They are ideally suited for new construction, although it can be applied as a top coat over oil stains after at least 7 days of dry time. Subtle highlighting effects can also be achieved using a base coat of Outlast Inside Satin light or medium, followed by a top-coat of Outlast Inside Satin Clear or Inside Clear Lo-Glos. **Made in the USA.**

Color	1 gal.	5 gal.
Clear Satin	\$81.00	\$375.00
Clear Lo-Glos	\$99.00	\$465.00
Light Tone Satin	-	\$375.00
Med. Tone Satin	\$81.00	\$375.00

[Order Online](#)



COLORFAST

Designed to even out wood porosity, creating a smoother surface for stain application and preventing over-absorption and a too-dark color. Apply on bare wood on the interior and under Sashco's Capture or Symphony® interior clear coat to avoid yellowing around wall décor. **Coverage:** Approx. 150-300 sq. ft. per gal. **Cleanup:** Soap and water. **Made in the USA.**
1 gal. \$66.59 5 gal. \$299.69

[See More Online](#)

POLYSEAL WALLS, WOODWORK, & FLOORS



An excellent water-based transparent varnish for all interior bare wood surfaces. With a combination of hard wearing polyurethane and acrylic resins and a higher level of solids, it cures harder and tougher, requiring fewer coats to achieve an elegant appearance. Its thicker body makes it easier to apply and its very low odor and fumes makes it much more pleasant to work with. **Application Temp:** 65-80° F. **Coverage:** 250-400 sq. ft. per gal. **Cleanup:** Soap and water. **Made in the USA.**

1 gal.	5 gal.
\$89.99-94.99	\$355.99-\$399.99

[See More Online](#)



PERMA-CHINK LIFELINE INTERIOR

Enhances the natural beauty and grain of your interior log walls and ceilings. Provides a breathable yet tough film finish that is easily washed, cleaned, and dusted. Reduces absorption of normal household odors into the wood. Non-flammable and virtually odorless. Lifeline Interior will not yellow and lets the natural look and beauty of wood show through.

Application Temperature: 40-90°F. **Coverage:** 350-800 sq. ft. per gal. **Cleanup:** Soap and water. **Made in the USA.**

1 gal.	5 gal.
\$65.99	\$287.99

[See More Online](#)



PERMA-CHINK LIFELINE SURE SHINE

A premium polyurethane finish that is specifically designed for finishing and protecting wood floors, cabinets, walls, and other wood surfaces where a clear, durable, scuff-resistant finish is desired. Its waterborne formulation is non-flammable, has little odor and resists yellowing. Once cured, Sure Shine is more durable than most water or solvent-based clear finishes. With its fast drying water based formula, multiple coats can be applied in a single day. **Application Temp:** 40-90° F. **Coverage:** 600-900 sq. ft. per gallon. **Cleanup:** Soap and water. **Made in the USA.**

1 gal.	5 gal.
\$122.99	\$481.99

[See More Online](#)

INTERIOR WOOD FINISHES



SANSIN PURITY FLOOR

With 2-3 coats it amplifies the natural tones and character of your wood floors. Durable, chemical- and scratch-resistant, it protects wood surfaces, including softwoods like pine. It levels extremely well, builds protection quickly and dries to a perfectly even, glass-like finish. **Application Temp:**

50-75° F. **Coverage:** 400-500 sq. ft. per gallon. **Cleanup:** Soap and water. **Do Not Freeze. Made in Canada.**

Purity Floor	1 gal.	5 gal.
Clear Gloss or Satin	\$134.12	\$616.96

[See More Online](#)

Resolution II is the second step in the Resolution I-II finishing system. Resolution II is a crystal-clear low-VOC finish available in gloss or satin formulas.

Application Temp: 50-75° F.

Coverage: Resolution I: 150-200 Resolution II: 75-100 sq. ft. per litre. **Cleanup:** Resolution I: Mineral Spirits Resolution II: Soap & Water **Do Not Freeze. Made in Canada.**

Quart (.95 liter)	2.5 Litre (.66 gal)
\$63.43 - \$64.66	\$124.10 - \$126.51

[See More Online](#)

AVOID FROZEN PRODUCT BY ORDERING INTERIOR FINISHES BEFORE COLD WEATHER HITS!



SANSIN PURITY INTERIOR

A low VOC, low odor, water-borne wood finish that enhances the wood's natural character.

- Clear minimizes the yellowing of the wood like pine, while maintaining a slight tan finish.
- Glacier remains completely clear in color and transparency and will not yellow over time.

Do not use Glacier over products like Sansin Classic or SDF.

Application Temp: 50-75° F. **Coverage:** 300-500 sq. ft. per gallon per application depending upon type of surface. **Cleanup:** Soap and water. **Do Not Freeze. Made in Canada.**

Sansin Purity Interior	1 gal.	5 gal.
Clear - Gloss & Satin	\$104.03	\$478.54
Glacier - Gloss, Low Luster, & Satin	\$87.19	\$401.09

[See More Online](#)



SYMPHONY INTERIOR CLEAR WOOD FINISH

The wood of a finely-crafted cello creates a distinguished resonance, just as Symphony® works in harmony with the unique character of your logs and wood to reflect an atmosphere of cozy warmth and elegance. Symphony's elastic yet scuff-resistant formula means hassle-free cleaning. Designed for the interior wood of your log home. Use on cabinets, paneling, wood trim, and over many stains to add depth and richness to the color. Symphony is a clear, fast-drying, non-yellowing, water-based polyurethane. Not recommended for floors. Satin or Gloss. **Application Temp:** 50-90° F.

Coverage: 200-500 sq. ft. per gallon. **Cleanup:** Soap & water - paint thinner for dried material. **Shelf Life:** 3 years. **Made in the USA.**

1 gal.	5 gal.
\$88.99 \$80.09	\$399.99 \$359.99

[See More Online](#)



UV GUARD is an exterior and interior acrylic waterbased, semi-transparent wood finish that contains advanced UV absorbers and stabilizers. Three Coat Application: two coats of pigmented finish followed by a top coat of clear is recommended.

Application Temp: 40-90° F. **Coverage:** 150-500 sq. ft. per gal. **Cleanup:** Soap and water. Dried brushes will require cleaning with lacquer thinner. **Do Not Freeze. Made in the USA. Advance Clear Top Coat, Dark Brown, Honey Brown, & Sunlight are available. All Other Colors are Special Order - Nonreturnable.**

Color	1 gal.	5 gal.
Advance Clear	\$67.96	\$308.99
Dark Brown	\$75.96	\$339.95
Honey Brown		
Sunlight		

[See More Online](#)



SANSIN RESOLUTION I & II

Sansin has developed a two-part wood finishing system that is tougher, more beautiful and longer-lasting than varnish. Designed for furniture, doors and other marine and land-based applications where UV resistance and moisture protection are a must, the Resolution system delivers brilliant clarity combined with chemical, scratch and water resistance. And, you can count on Resolution coming in a low-VOC, easy to apply gloss or satin finish. Available in several natural wood tones, and in clear for interior wood. For teak, choose Resolution I Teak Yellow or Teak Red for first coat exterior applications. DO NOT mix Resolution I and Resolution II with each other or with any other formulas.

Resolution I is the primer step in the Resolution I-II finishing system. As the primer step in the Resolution finishing system, Resolution I may also be used as standalone protection for wood interiors. Resolution I is a high solids finish that penetrates and fills wood grain with deep UV and moisture protection.

Notice: Finishes shipped to: CA, CO, CT, DC, ME, MN, NY, OR, RI, & VT will include an additional \$0.75 per 1-gal and \$1.60 per 5-gal pail sold in order to comply with PaintCare State Law Legislation. (Minnesota & Vermont are now \$0.99 per 1-gal and \$1.99 per 5-gal pail). To find out more go to www.paintcare.org

HAPPY Thanksgiving ONE AND ALL

CALENDAR:

Labor Day	Sept. 4th	Office Closed
Daylight Savings	Nov. 5th	Set Clocks Back
Thanksgiving	Nov. 23rd-24th	Office Closed

TO PLACE AN ORDER:

Call Toll Free: 1-800-359-6614 or order online:
www.loghelp.com Fax Toll Free: 1-800-755-3249

SCHROEDER LOG HOME SUPPLY, INC.
 1101 SE 7th Ave Grand Rapids, MN 55744

BUSINESS HOURS:

MAY - OCT: Weekdays 8:00 - 4:30 p.m. CST (Saturdays by appointment).
NOV - APRIL: Weekdays 8:00 - 4:30 p.m. CST (Closed Saturdays).
 If traveling long distances - Please Call Ahead



RESTORATION SPECIAL



We are often asked how to restore rotten logs. We suggest [The Log Home Maintenance Guide](#). It reveals tips and tricks for using wood epoxies for log home restoration. To help you get started with your restoration project, we offer a 15% Discount off *The Log Home Maintenance Guide* when you buy any wood epoxy products like [LiquidWood](#), [WoodEpoxy](#), or the [Wood Restoration Kit](#) and this book. If you call in your order, just ask for the "Restoration Special". If you order online, your discount will be applied after we receive your order. Offer good for one book per order.

RECEIVE THE LOG CORE IN YOUR IN-BOX

Just sign up at logcore.com and you'll receive an email notification when each new issue is online. Your information will not be sold and you can unsubscribe at any time. (An unsubscribe link is posted at the bottom of every notification.)

SEE SALE ITEMS AT WWW.LOGHELP.COM

DID YOU KNOW?

LIFETIME
WOOD TREATMENT

LIFETIME IS ALREADY ON SALE!
ENJOY AN ADDITIONAL 10% OFF THROUGH OCTOBER!

Order Online

See More Sale Items Online!

OMG Fasteners On Sale!

10 Packs Available!



Order Online



Order Online



Order Online

TREAD SPREAD



Prevent Slip and Fall Accidents with Tread Spread. Bonds tenaciously to concrete, wood, metal, fiberglass, and most rigid surfaces. Use on wet, dry, and underwater surfaces. High-traction and easy to apply. Much more durable and longer lasting than tapes. Exceeds OSHA and ADA recommendations for slip resistance in both wet and dry conditions.

Applications: Pools, decks, locker rooms, boats, steps, ramps, and other surfaces where slip resistance is needed.

Colors: Slate Gray (Safety Yellow available by request)

Coverage: 12 square feet x 1/8" thick per gallon

Hardening Time: 1 hour approx.

2 Pint Kit PR011-TREAD SPREAD-2PT \$49.50

Order Online

2 Gallon Kit PR011-TREAD SPREAD-1GAL \$197.90

Follow these easy instructions for a long-lasting application:

1. Apply tape to create stencil.
 2. Mix together equal volumes of TREAD SPREAD Part A and B.
 3. Apply with trowel or putty knife.
 4. Remove tape before hardening.
-